

Dynisco Melt Monitor Alarm Series



Description


The Dynisco Melt Monitor Alarm Series is a melt pressure transducer with an integral digital display. An optional temperature measurement is available. The Melt Monitor has been designed for the rigorous environments of the plastics extruder. Standard features, including the digital auto-zero and peak display function provides easy operation with an accurate pressure measurement. With the optional built in temperature sensor, the display is capable of providing both process pressure and temperature simultaneously. The Melt Monitor comes standard with two programmable alarm relays. The alarms can be programmed for either manual or automatic reset and early warning indication. In addition, these models are provided with two digital inputs for remote reset and remote zero, as well as 4 - 20 mA, 0 - 10 Vdc and 1 - 5 Vdc user selectable, retransmission of the pressure signal.

Features

- Dual 5-digit display
- Peak display function and digital auto-zero
- Programmable alarm relays
- Optional 4-20 mA, 0-10 Vdc retransmission
- Accuracy better than $\pm 0.5\%$
- Customer defined engineering units
- Melt pressure and optional temperature displayed
- Alarm setpoint can be displayed for pressure
- Manual and automatic reset and early warning
- Send high level signals to DCS or PLC
- Accurate over a wide range of temperatures
- Available in PSI, bar, MPa or kg/cm^2

Performance Characteristics	
Ranges:	0-500 to 0-20,000 psi
Accuracy:	
Pressure:	±0.5%
Temperature:	±0.5%
Sampling Speed:	0.02 mS
Power Supply:	Universal 110/220 Vac or 24 Vdc (optional)
Displays:	5-digit LED's, 0.5" Primary and 0.4" Secondary
Pressure:	PSI, bar, MPa or kg/cm ²
Resolution:	1 PSI, 0.1 bar, 0.01Mpa or 0.1kg/cm ²
Temperature:	°C or °F
Resolution:	0.1°C or 0.1°F
LED's:	Alarm 1, Alarm 2, IN (Reset), A/B (MODBus)
Temperature & Mechanical Characteristics	
Electronics Temp. Range:	32 to 158°F (0 to 70°C)
Max Diaphragm Temp:	750°F (400°C)
Humidity:	Less than or equal to 80%
Optional Temp. Compensation:	70 to 615°F (20 to 325°C)
Electrical Termination:	2-7 pin connector (included)
Alarms:	(2) -1-SPDT + 1-SPST relay, 110 - 220 Vac
Alarm Range Resolution:	00001 - full scale value
Digital Inputs:	remote-zero and remote-reset
Retransmission Outputs:	4-20 mA, 0-10 Vdc, 1-5 Vdc
Communications:	RS-485 MODBus - RTU
Weight:	2.5 to 3.5 lbs.

Ordering Guide

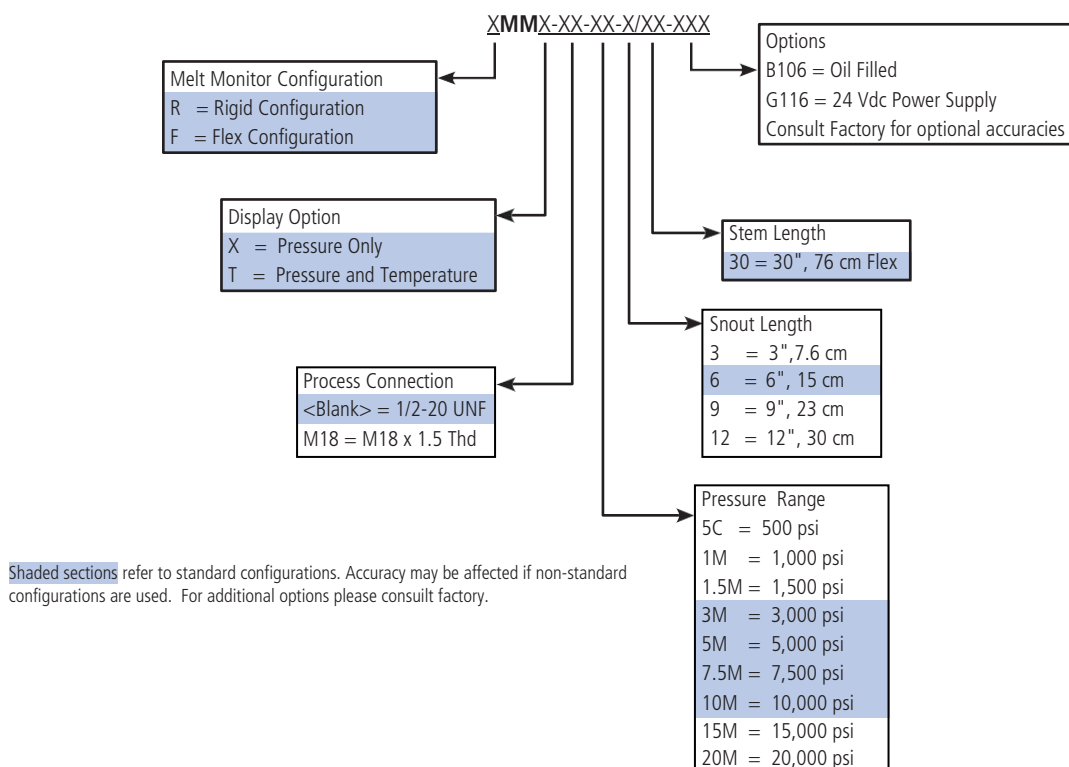


Azurr-Technology, s.r.o.

Dolní Bečva 579 Tel.: +420 571 647 228
756 55 Tel.: +420 571 647 310
Česká republika Email: info@azurr-tech.cz
www.azurr-tech.cz



Všechny rozměry jsou uvedeny v palcích (mm), pokud není uvedeno jinak. © 2016.
Společnost Dynisco si vyhrazuje právo provádět změny bez předchozího upozornění.
Přístupy k dokumentům jako jsou návody k obsluze a jiné podpůrné dokumenty
naleznete na www.dynisco.com
Rev:1216

Dimensions

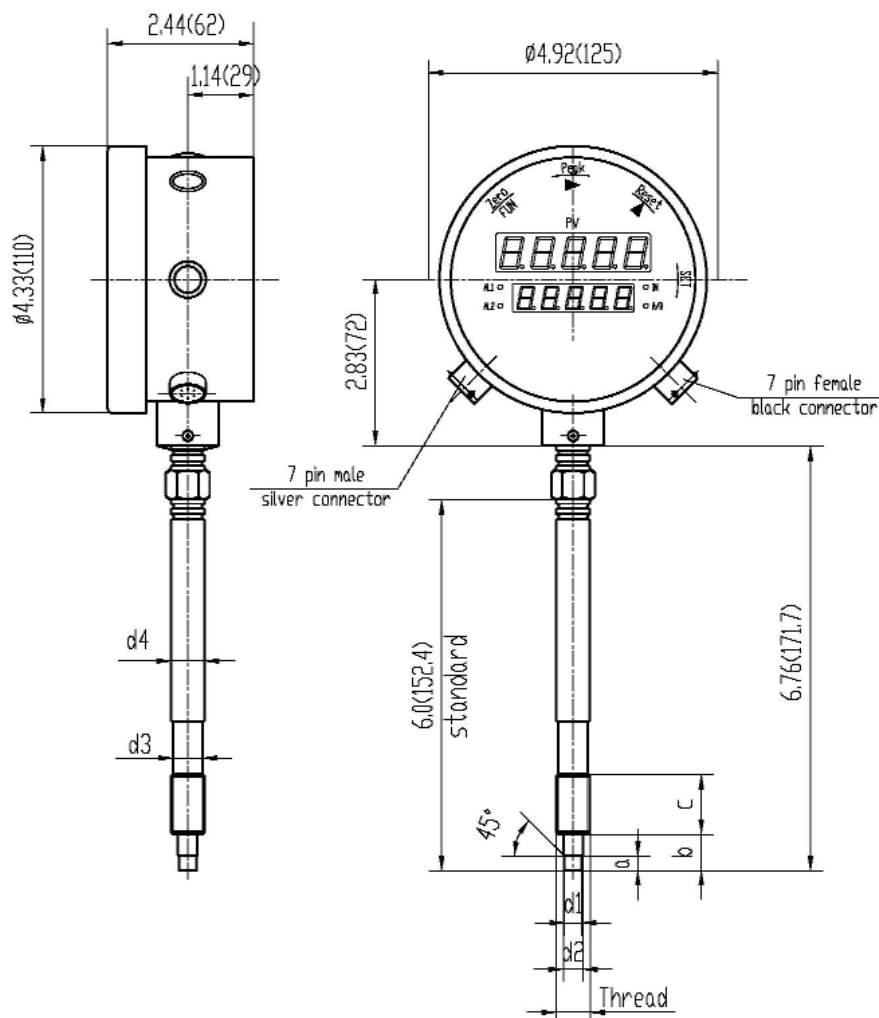

Thread	D1	D2	A	B	C	D3	D4
1/2-20	0.307(7.8) 0.303(7.7)	0.413(10.5) 0.407(10.35)	0.217(5.5) 0.211(5.35)	0.441(11.2) 0.233(11.0)	0.629(16.0)	0.41(10.5)	0.5(12.7)
M18 x 1.5	0.394(10.0) 0.386(9.8)	0.610(15.5) 0.602(15.3)	0.236(6.0) 0.230(5.85)	0.551(14.0) 0.543(13.8)	0.787(20.0)	0.63(16.0)	0.669(17.0)

CE EAC

Azurr-Technology, s.r.o.

Dolní Bečva 579 Tel.: +420 571 647 228


756 55 Tel.: +420 571 647 310

Česká republika Email: info@azurr-tech.cz

www.azurr-tech.cz



Všechny rozměry jsou uvedeny v palcích (mm), pokud není uvedeno jinak. © 2016.
Společnost Dynisco si vyhrazuje právo provádět změny bez předchozího upozornění.
Přístupy k dokumentům jako jsou návody k obsluze a jiné podpůrné dokumenty
naleznete na www.dynisco.com
Rev:1216

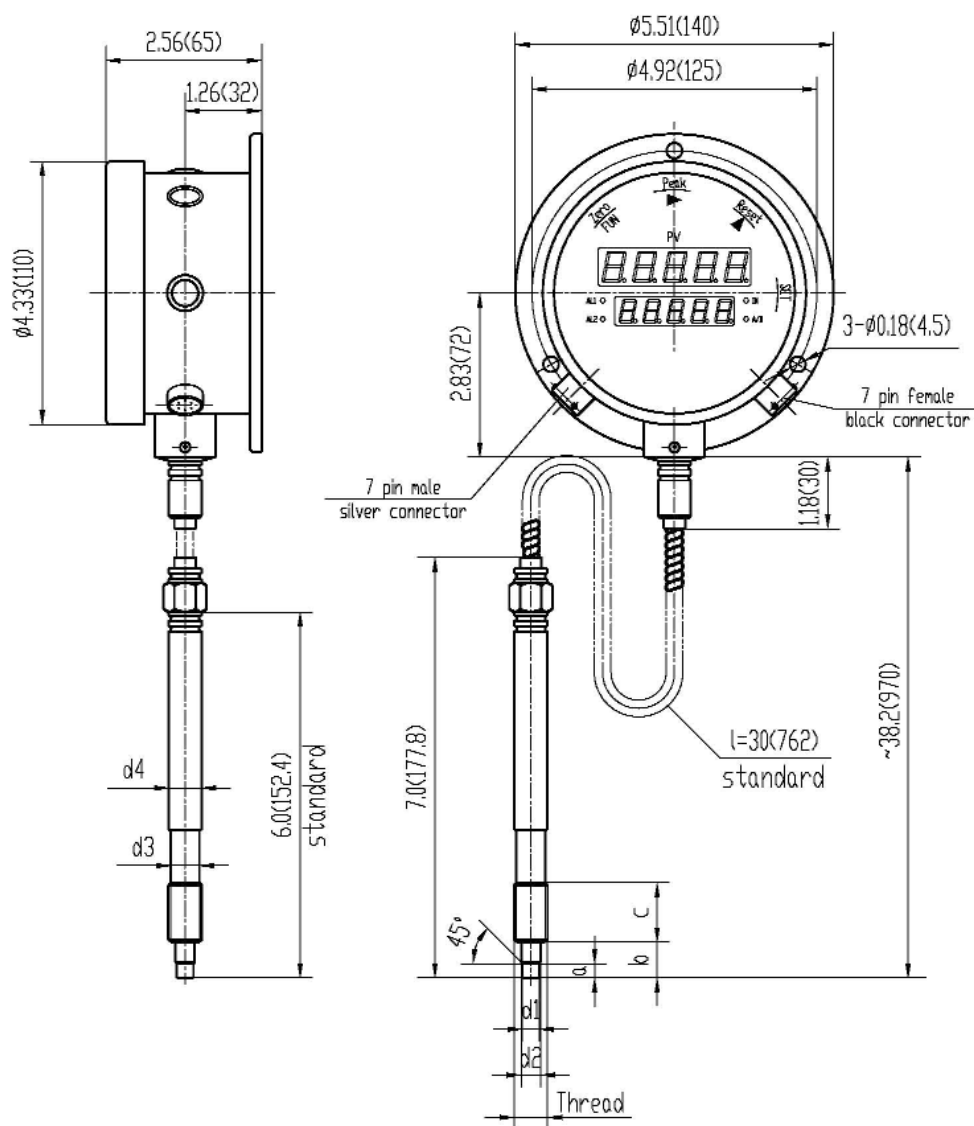

Thread	D1	D2	A	B	C	D3	D4
1/2-20	0.307(7.8) 0.303(7.7)	0.413(10.5) 0.407(10.35)	0.217(5.5) 0.211(5.35)	0.441(11.2) 0.233(11.0)	0.629(16.0)	0.41(10.5)	0.5(12.7)
M18 x 1.5	0.394(10.0) 0.386(9.8)	0.610(15.5) 0.602(15.3)	0.236(6.0) 0.230(5.85)	0.551(14.0) 0.543(13.8)	0.787(20.0)	0.63(16.0)	0.669(17.0)

CE ENEC

Dynisco



Azurr-Technology, s.r.o.

Dolní Bečva 579 Tel.: +420 571 647 228
756 55 Tel.: +420 571 647 310
Česká republika Email: info@azurr-tech.cz
www.azurr-tech.cz



Všechny rozměry jsou uvedeny v palcích (mm), pokud není uvedeno jinak. © 2016.
Společnost Dynisco si vyhrazuje právo provádět změny bez předchozího upozornění.
Přístupy k dokumentům jako jsou návody k obsluze a jiné podpůrné dokumenty
naleznete na www.dynisco.com
Rev:1216