

PT4654 XL

Pressure transmitter

Repeatable, reliable pressure measurements



Description

The Dynisco PT4654XL Series transmitter is a $\pm 0.5\%$ sensor ideal for injection molding machine nozzles or hot runners to measure polymer melt pressure. The PT4654XL transmitter provides the industry standard 4 - 20 mA amplified signal to data acquisition or SPC/SQC programs. The PT4654XL comes equipped with adjustable zero and span pots. The PT4654XL features a 1/2-20 UNF jam nut for simple and easy installation in space restricted areas. The transmitter can be supplied in a variety of lengths to meet the requirements of the application.


Features

- Adjustable zero and span
- Accuracy better than $\pm 1.0\%$
- Inconel diaphragm
- 4 - 20 mA output
- 0 - 3,000 to 0 - 20,000 psi
- Internal 80% shunt calibration


Performance Characteristics	
Output:	4 - 20 mA
Input Voltage:	14 - 36 Vdc
Combined Error:	± 1.0% FSO (Including Linearity, Repeatability & Hysteresis)
Repeatability:	± 0.2%FSO
Configuration:	Four-arm bonded foil Wheatstone bridge strain gage
Load Resistance:	0 - 1,100 Ohms
Over Pressure:	2 X FSO or 35,000 psi (whichever is less)
Zero Balance Adjustment Range:	± 0.5%, min. -2% to 5% fs
Internal Shunt Calibration (R-Cal):	80% FSO ± 0.5%
Insulation Resistance:	1000 megohms @ 50 Vdc

Temperature & Mechanical Characteristics	
Max Diaphragm Temperature:	750°F (400°C)
Zero Shift (due to temperature change):	< 20 psi/100oF Typical (36 psi/100oC)
Electronics Operating Temperature:	-20°F to 185°F (-25°C to 85°C)
Zero Shift Due to Temperature Change:	± 0.05% FS/°F max (± 0.10% FS/°C max)
Mounting Torque:	500 inch/lbs. maximum
Standard Wetted Parts:	Inconel 718

Ordering Guide for PT4654XL Series

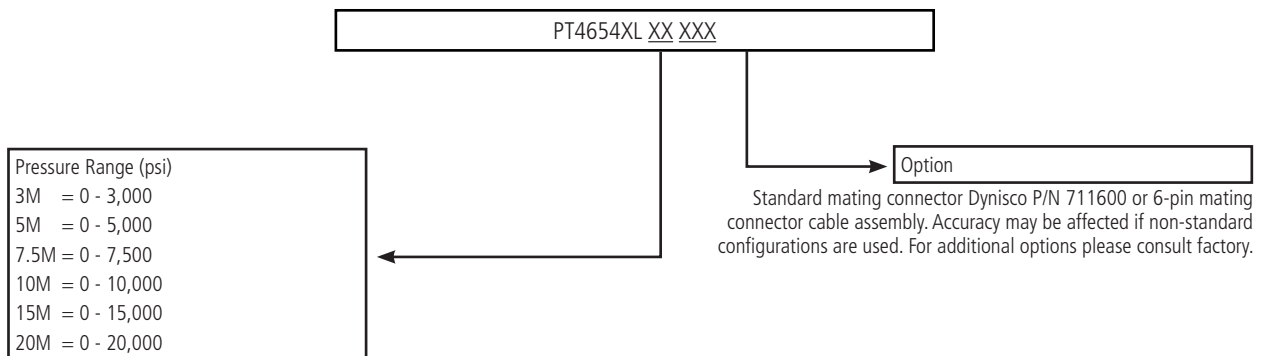

Dimensions

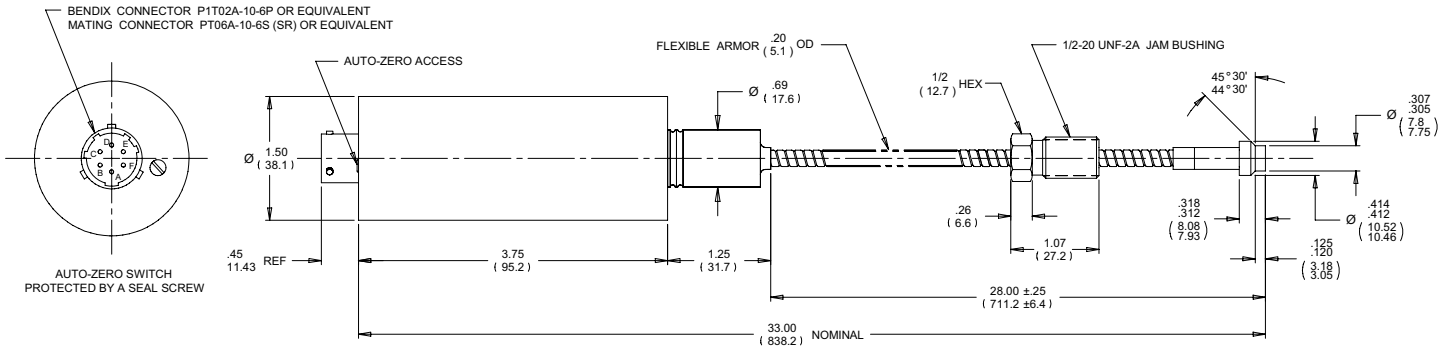

CONNECTOR WIRING	
PIN	FUNCTION
A	SIGNAL +
B	SIGNAL -
C	NO CONNECTION
D	AUTO-ZERO
E	INTERNAL CAL RESISTOR
F	GROUND

NOTES
 1. DIMENSIONS ARE IN INCHES (MILLIMETERS)



Azurr-Technology, s.r.o.

Dolní Bečva 579 Tel.: +420 571 647 228
 756 55 Tel.: +420 571 647 310
 Česká republika Email: info@azurr-tech.cz
 www.azurr-tech.cz



Všechny rozměry jsou uvedeny v palcích (mm), pokud není uvedeno jinak. © 2016.
 Společnost Dynisco si vyhrazuje právo provádět změny bez předchozího upozornění.
 Přístupy k dokumentům jako jsou návody k obsluze a jiné podpůrné dokumenty
 naleznete na www.dynisco.com
 Rev:1216