

# EPR3 Push Rod Melt Pressure Sensors

ENHANCED PUSH-ROD DESIGN  
MELT PRESSURE TRANSDUCER



## Description

Dynisco's model EPR3 high - temperature melt pressure transducer is offered as an alternative to its PT420 and PT460 series. The push - rod design is suitable for applications where the use of a filled system may not be desirable, such as the extrusion of food and medical products and the manufacture of photographic film. Model EPR3 is available in pressure ranges from 0 - 1,500 through 0 - 10,000 psi.


## Features

- Better than  $\pm 0.5\%$  accuracy
- Push - rod design
- Measures up to 750°F (400°C)
- All stainless steel, wetted parts
- Internal 80% shunt calibration

Performance Characteristics	
Ranges (psi):	0 - 1,500, 0 - 3,000, 0 - 5,000, 0 - 7,500, 0 - 10,000
Accuracy:	±0.5% FSO
Repeatability	±0.2% FSO
Mounting Torque:	100 inch - lbs. recommended, 250 inch - lbs. maximum
Maximum Pressure:	150% full scale
Material In Contact With Pressure Media:	17 - 4 PH stainless steel, Dymax® coated
Weight:	13.25 oz.
Electrical Characteristics	
Configuration:	Four active arm bonded Wheatstone bridge strain gage
Bridge Resistance:	Input: 345 Ohms minimum; Output: 350 Ohms ±10%
Full Scale Output:	±5% full scale
Zero Balance:	Melt Flow Index
Excitation:	10 Vdc recommended, 12 Vdc maximum
Internal Shunt Calibration (R-Cal):	80% FSO ±1.0%
Insulation Resistance:	1,000 megohms at 50 VDC

Temperature Characteristics	
Transducer Diaphragm:	
Maximum Diaphragm Temperature:	750°F (400°C)
Zero Shift Due To Temperature Change:	±1.0% full scale/100°F (±2.0% full scale/100°C)
Sensitivity Shift Due To Temperature Change:	±1.0% full scale/100°F (±2.0% full scale/100°C)
Electronics Housing:	
Maximum Temperature:	250°F (121°C)
Zero Shift Due To Temperature Change:	±1.0% full scale/100°F (±2.0% full scale/100°C)
Sensitivity Shift Due To Temperature Change:	±1.0% full scale/100°F (±2.0% full scale/100°C)

### Ordering Guide for EPR3

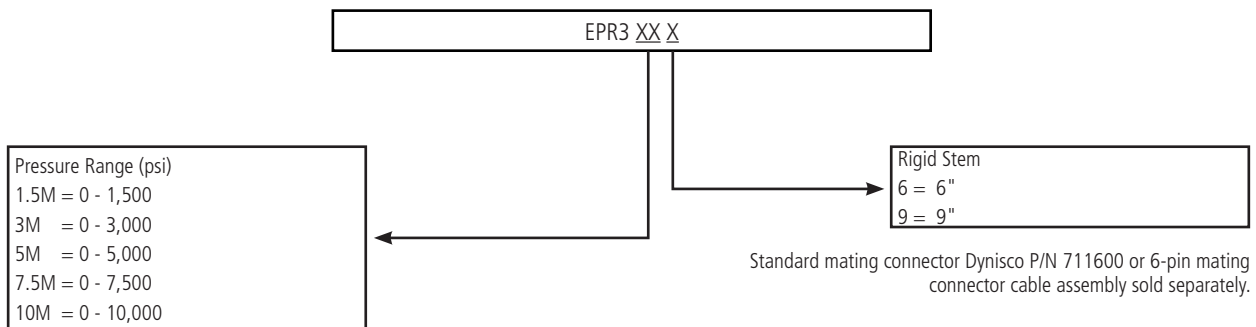


**Azurr-Technology, s.r.o.**

Dolní Bečva 579 Tel.: +420 571 647 228  
 756 55 Tel.: +420 571 647 310  
 Česká republika Email: info@azurr-tech.cz  
 www.azurr-tech.cz



Všechny rozměry jsou uvedeny v palcích (mm), pokud není uvedeno jinak. © 2016.  
 Společnost Dynisco si vyhrazuje právo provádět změny bez předchozího upozornění.  
 Přístupy k dokumentům jako jsou návody k obsluze a jiné podpůrné dokumenty  
 naleznete na [www.dynisco.com](http://www.dynisco.com)  
 Rev.:1216

## Dimensions

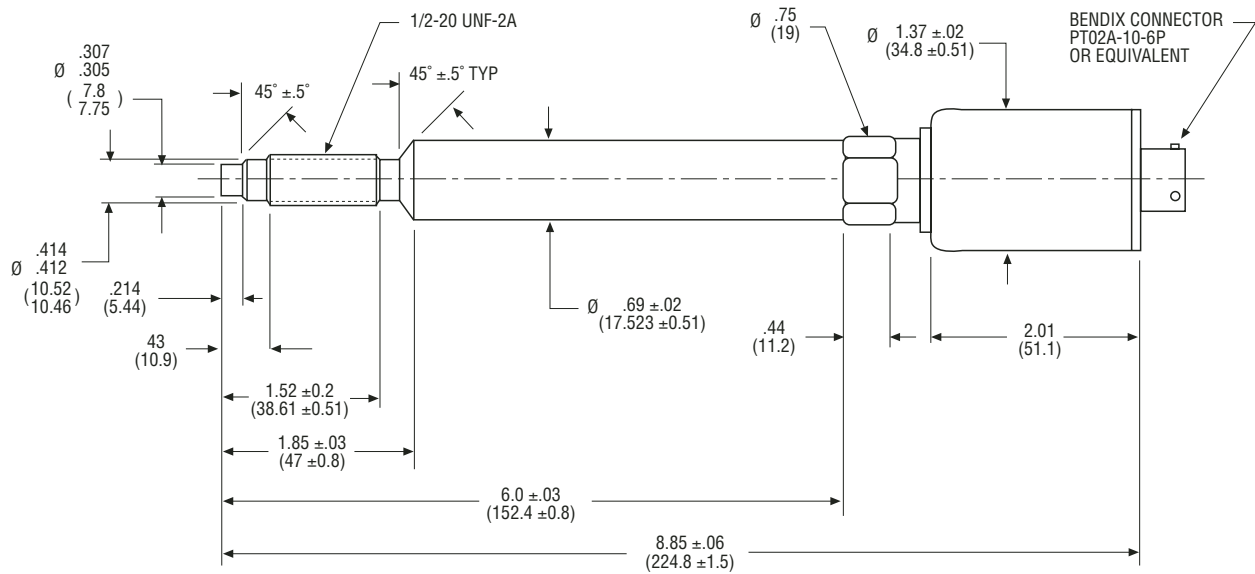

All dimensions are in inches (millimeters) unless otherwise specified