

PELLETIZING SYSTEMS >



DURO belt dryer

Efficient pellet drying technology
for abrasive pellets

 **AUTOMATIK**

The DURO belt dryer in combination with the underwater pelletizing systems from Gala and Automatik is the perfect solution for the production of abrasive or brittle pellets such as compounds highly filled with fiber glass or minerals. The drying process does not use any rotating parts and thus is a very gentle process reducing costs related to wear to a minimum.

Your benefits

- Most gentle pellet handling due to the lack of relative movements of the pellets against the dryer components
- Minimum dust
- High product quality
- Minimized life cycle costs due to reduced wear and extended lifetime of the components in direct contact with the pellets

DURO belt dryer


The solution for abrasive pellets

Functioning

The slurry of water and pellets is fed through the pre-watering chute **01**, which removes up to 95% of the process water.

The pellets are then evenly distributed onto the perforated conveyor belt **02**. Suction through the perforated belt **03** at high airspeed removes surface water from the pellets. The residual heat of the pellets assists in the evaporation of the remaining surface moisture.

The pellets may be further cooled in subsequent components, e.g. a spiral cooling conveyor. The collected water **04** is recirculated back to the process loop.

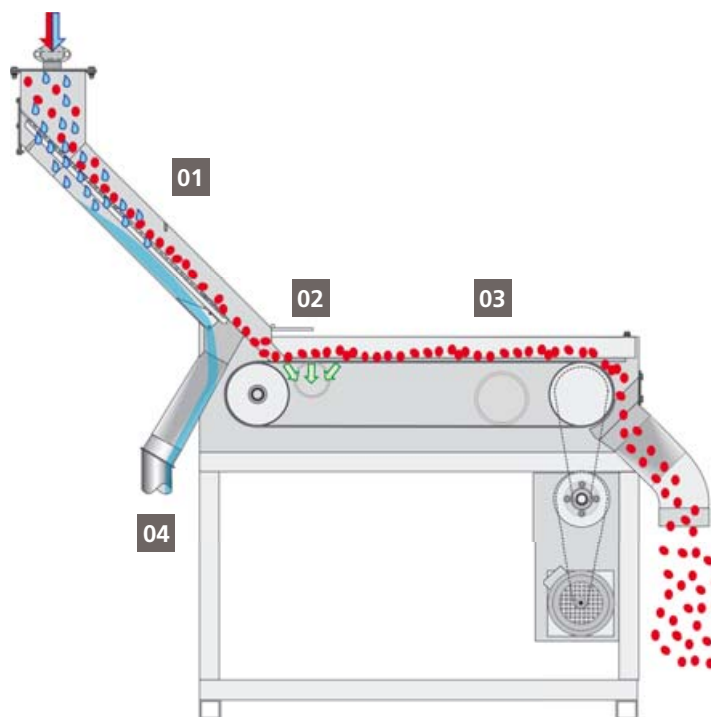

Functional diagram of DURO belt dryer



DURO belt dryer



Conveyor belt with pellets

Technical data:	DURO 1000	DURO 3000	DURO 6000
Throughput rates:	1,500 kg/h	3,000 kg/h	5,000 kg/h
Water throughput:	25 m³/h	45 m³/h	80 m³/h
Motor power (belt):	1.1 kW	1.1 kW	1.1 kW
Pellet temperature at the end of dryer (with spiral conveyor):	100-140 °C (60-80 °C)		

Technical specifications:	
System:	SPHERO® and CYCLO®
Main applications:	Abrasive or brittle compounds
Pre-dewatering:	Gravitational separation through a slotted screen
Primary drying:	Airflow (suction) through perforated conveyor Evaporation section on the conveyor/spiral conveyor
Pellet conveyance:	Pellets rest on conveyor belt
Throughput rate:	Up to 6,000 kg/h