

# Dynisco UPR900 Process Indicator

*1/4 DIN PANEL DISPLAY OF  
PRESSURE AND/OR TEMPERATURE  
OR DIFFERENTIAL PRESSURE*



## Description

The Dynisco UPR900 is a compact 1/4 DIN process indicator. The UPR900 can display your choice of engineering units related to a selectable range of input types. Add an optional secondary input for an all-in-one display of polymer melt pressure and temperature. The secondary input can be strain gauge to indicate differential pressure measurement. The UPR900 includes two standard assignable alarms with the option to add a 3rd. The LCD graphical display allows for easy reading of trending graphs with user selectable monochromatic configurations.

The UPR900 is easily field-configured, can be programmed remotely via optional Modbus RS-485 or can be programmed with BlueControl software.


## Features

- Graphical/text LCD Display with color change LED backlight on alarm (red/green)
- Graphical trend view of process, alarms & events as standard
- Easy to use Setup Wizard
- Display of differential pressure is available
- USB port options for access to configuration and log files
- Data logging option logs process values, sets points and alarms to .csv file for use with spreadsheets
- Modbus RS-485 and Modbus TCP Ethernet support
- BlueControl configuration and commissioning software option
- Display pressure, temperature, or even differential pressure
- Optional second input/output for cost-effective single instrument
- Analog retransmission of process variable allows signal to be sent to other devices
- Configure locally or remotely by optional Modbus RTU

Performance Characteristics	
<b>Instrument Type:</b>	Digital, panel-mount PID closed loop indicator
<b>Display:</b>	160 x 80 Monochromatic Graphical LCD with backlight
<b>Accuracy:</b>	
<b>Thermocouple:</b>	±0.1% of full range, ±1LSD (±1°C for internal CJC if enabled)
<b>DC Linear:</b>	±0.1% of full range, ±1LSD
<b>Sampling Time:</b>	50mS, typical
Input	
<b>Input:</b>	Strain gauge, Thermocouple or linear (Vdc, mA)
<b>Strain Gauge:</b>	350 to 5000Ω, 1.4 to 4mV/V, excitation 10V ±7%
<b>Linear Input:</b>	0 to 5Vdc and 0 to 10Vdc, 0 to 20mA and 4 to 20mA
<b>Input Signal:</b>	-25 to 125% full scale (approximately -10mV to +50mV)
<b>Input Impedance:</b>	<10Ω for linear current input >165kΩ for linear voltage input
<b>Shunt Calibration:</b>	With or without resistor (40 to 100%)
<b>Digital:</b>	4 programmable voltage-free contact closure
Alarm Outputs	
<b>Alarm Type:</b>	SPST 2A max @ 240Vac resistive load Dual relays have shared common
<b>Alarm Number:</b>	3 standard
<b>Alarm Update Time:</b>	100mS, typical
Outputs	
<b>Type (Retransmission):</b>	0-5Vdc and 0-10Vdc, 0-20mA and 4-20mA
<b>Resolution:</b>	15 3/4 bit
<b>Accuracy:</b>	±0.1% of output span (mA @ <500Ω, V @ >500Ω)
Communications	
<b>Type:</b>	Isolated RS-485
<b>Protocol:</b>	Modbus RTU

Mechanical & Packaging Characteristics	
<b>Termination:</b>	Screw terminals on rear
<b>Front Panel:</b>	IP65 with gasket (IP65 front USB connector)
<b>Operating Temp:</b>	32 to 122°F (0 to 50°C)
<b>Storage Temp:</b>	-4 to 158°F (-20 to 70°C)
<b>Humidity:</b>	85% relative humidity, non-condensing
<b>Weight:</b>	1.43 lbs. (650g)
Approvals & Certifications	
<b>CE Mark:</b>	Self-certified to applicable standards
<b>Agency Approvals:</b>	UL
Power Supply (Mains)	
<b>Input Power</b>	
<b>Mains Version:</b>	100 to 240Vac, 50/60Hz switching
<b>Low Voltage Version:</b>	20 to 48 Vac 50/60Hz 25VA or 22 to 65Vdc 12W
<b>Power Consumption:</b>	15VA, max
<b>Transmitter Power Supply:</b>	24Vdc into 400Ω min, 60mA drive for 2-or 4-wire mA transmitters

## Ordering Guide

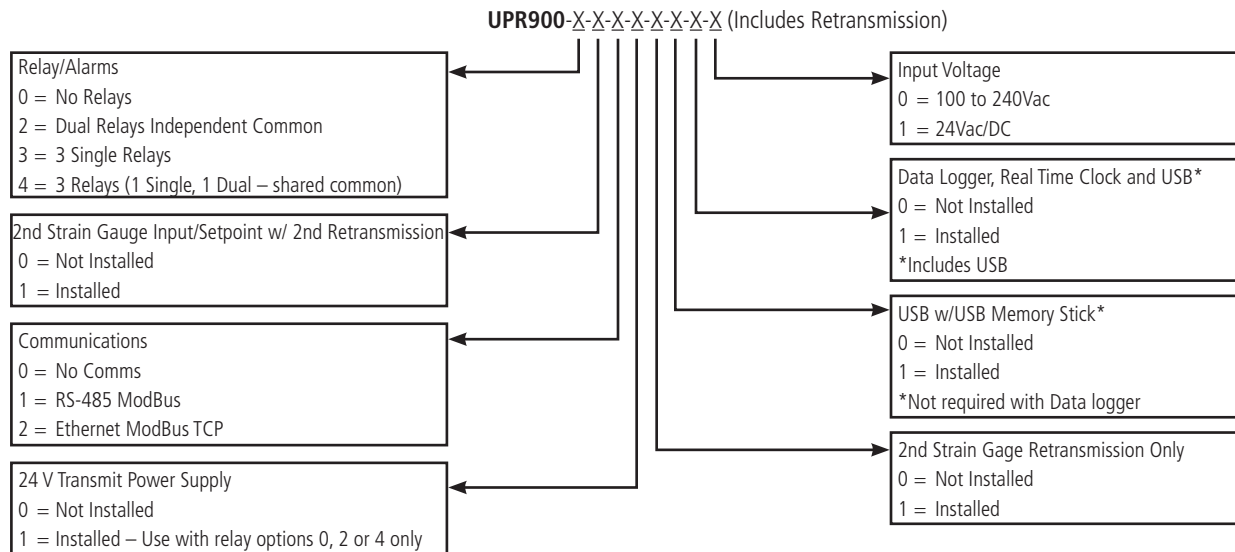


### Azurr-Technology, s.r.o.

Dolní Bečva 579 Tel.: +420 571 647 228  
 756 55 Tel.: +420 571 647 310  
 Česká republika Email: info@azurr-tech.cz  
 www.azurr-tech.cz



Všechny rozměry jsou uvedeny v palcích (mm), pokud není uvedeno jinak. © 2016.  
 Společnost Dynisco si vyhrazuje právo provádět změny bez předchozího upozornění.  
 Přístupy k dokumentům jako jsou návody k obsluze a jiné podpůrné dokumenty  
 naleznete na [www.dynisco.com](http://www.dynisco.com)  
 Rev:1216

## Dimensions

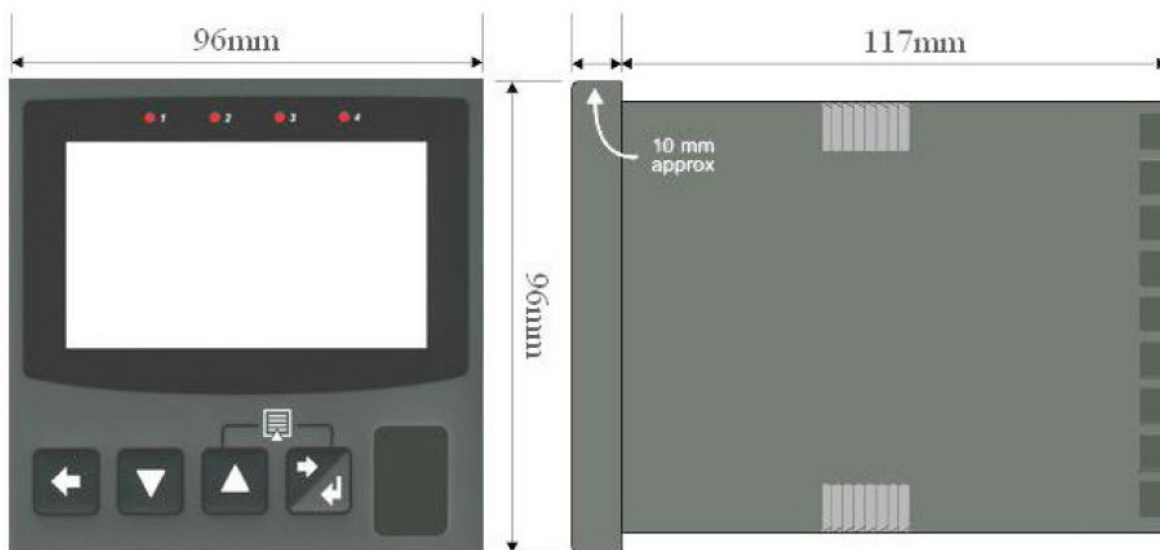

CE EAC

 **Dynisco**



**Azurr-Technology, s.r.o.**

Dolní Bečva 579 Tel.: +420 571 647 228  
756 55 Tel.: +420 571 647 310  
Česká republika Email: info@azurr-tech.cz  
www.azurr-tech.cz



Všechny rozměry jsou uvedeny v palcích (mm), pokud není uvedeno jinak. © 2016.  
Společnost Dynisco si vyhrazuje právo provádět změny bez předchozího upozornění.  
Přístupy k dokumentům jako jsou návody k obsluze a jiné podpůrné dokumenty  
naleznete na [www.dynisco.com](http://www.dynisco.com)  
Rev.:1216